




# WIRE FENCE BRACES




Drive staple about half its length into brace post about 4 inches above brace member on opposite side from brace.




Drive staple in similar manner on anchor post about 4 inches from ground line opposite side of brace.

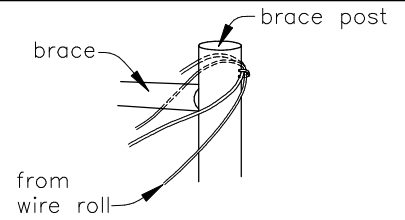


Unroll enough brace wire for two complete loops around anchor and brace post.




Thread end of brace wire through one staple and then through the other. Repeat to from three wire strands.



Wrap wire around anchor post and return toward brace post.

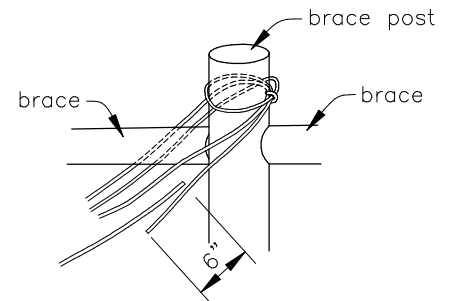

Cut brace wire from roll allowing enough wire to wrap around brace post and extend 6 to 12 inches past other wire end. Make splice.

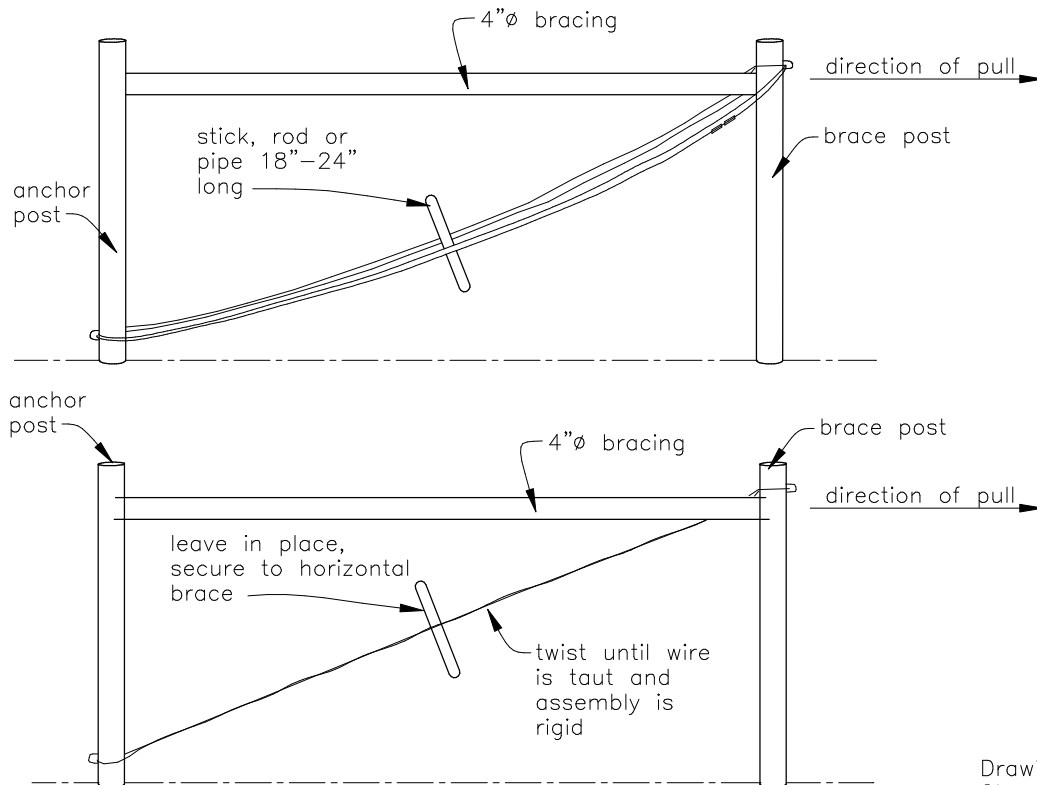

BRACE

Drawing not to scale.  
Standardized drawing  
must be adapted to  
the specific site.

JOB CLASS

Date

CAD FILE NO.

LSK-0250.DWG

SHEET OF

Designed \_\_\_\_\_

Drawn \_\_\_\_\_

Checked \_\_\_\_\_

Approved \_\_\_\_\_

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE